



NetScaler **FIPS**

Delivering scalability and performance for enterprises with the highest security requirements

NetScaler FIPS

NetScaler is an application security and delivery platform that helps you scale and protect your applications using data and insights to enable peak performance. Whether you're delivering applications to your customers, your workforce, or both, NetScaler helps you do it reliably and securely.

NetScaler is built on a single operating system, so no matter which ADC form factors you choose you'll manage them from one place. The operational consistency and deep observability you get with NetScaler makes it easier to apply consistent security policies and to troubleshoot faster.

With Citrix Universal Hybrid Multi-Cloud License and Citrix Platform License, you can reallocate throughput capacity and instances to wherever you need them at any time. No matter where you choose to deploy your ADCs — on-premises, public cloud, or both — your subscription price will remain the same.

What is FIPS?

The Federal Information Processing Standard (FIPS) 140-2 and 140-3 are standards and guidelines developed by National Institute of Standards and Technology (NIST) used to evaluate and approve cryptographic modules.

NetScaler FIPS

NetScaler offers specific physical and virtual platforms with FIPS 140-2 certification and FIPS 140-3 certification to meet the most stringent compliance mandates and security requirements. NetScaler MPX 9100 FIPS and 8900 FIPS (release version 13.1) are on DoDIN Approved Product List.


Learn more about NetScaler FIPS 140-2 compliance by visiting the [NetScaler Trust Center](#).

Key NetScaler links

[Compare features by subscription](#)

[Engage with the NetScaler Community](#)

[Leverage NetScaler Github](#)

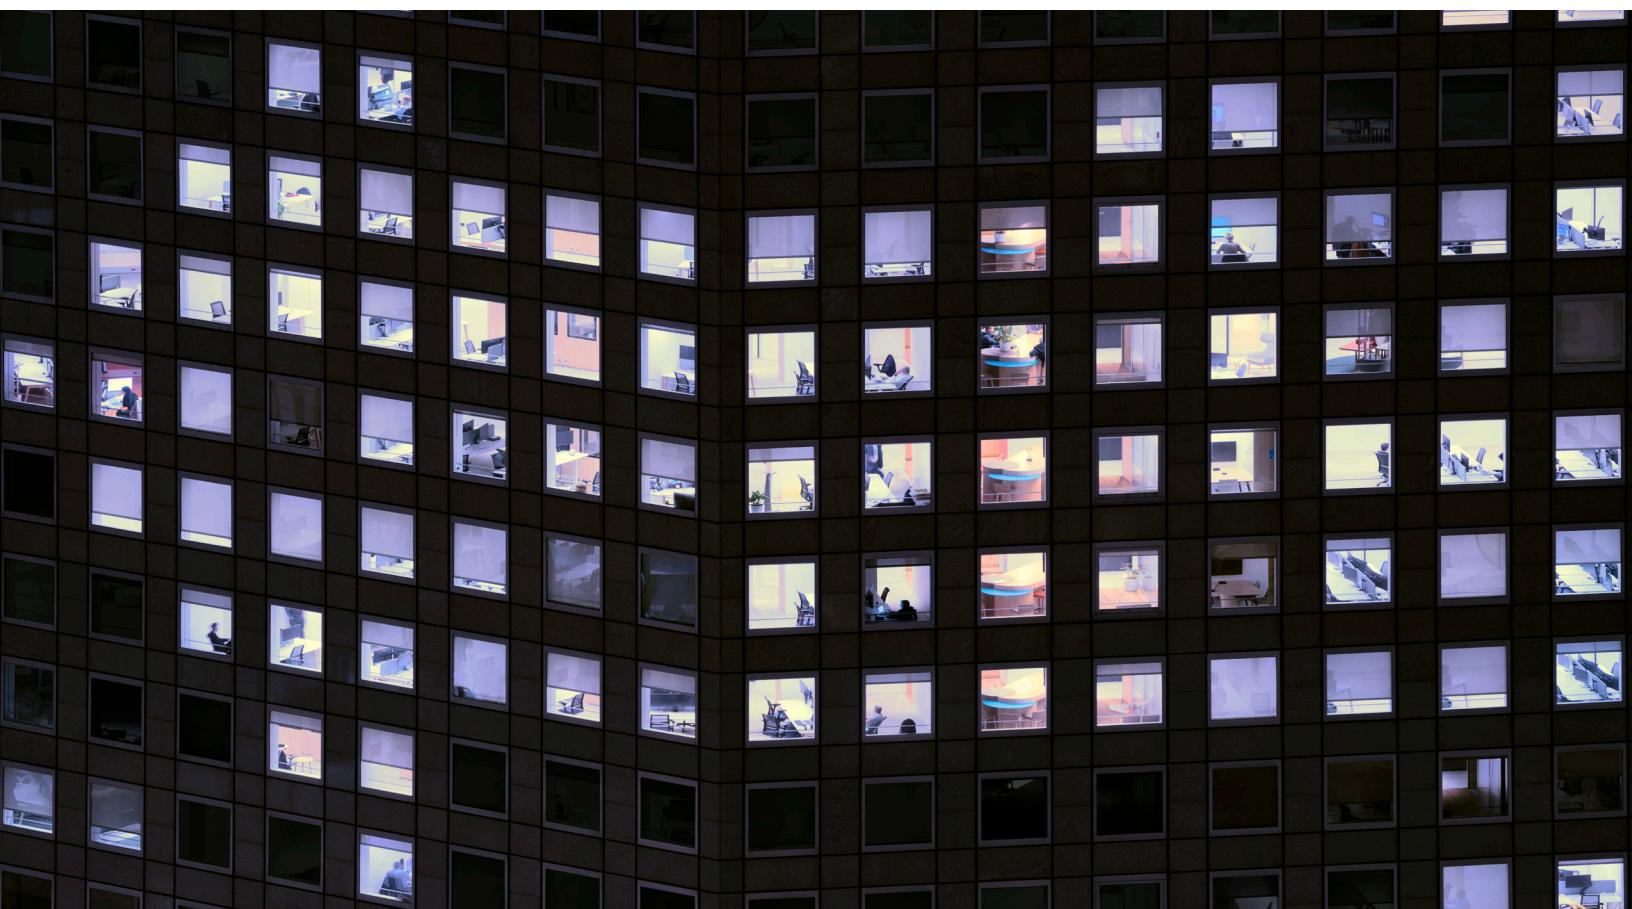

NetScaler models**MPX 9100Z FIPS****Attributes**

| | |
|-----------------------------|---|
| FIPS Standard | 140-3 Level 2 Certified (#4830) |
| Memory | 64 GB |
| Ethernet ports ¹ | 8 x 25GbE SFP28 |
| Transceivers support | SFP28: 25/10GbE SFP28 SRR, DAC 10/1GbE SFP+ SR, LR 10GbE DAC 1GBase |
| RAID support | No |

Performance

| | |
|--|--------------|
| System throughput (Gbps) [L4/L7 throughput] | 10-95 |
| L4/L7 HTTP request/second | 3,000,000 |
| SSL transactions/second (2k key certificates) ² | 90,000 |
| EDCHE transactions/second | 39,000 |
| SSL throughput (Gbps) | 55 |
| Compression throughput (Gbps) | 12 |
| ICA Proxy/SSL VPN concurrent users | Up to 17,000 |

Mechanical, environmental, and regulatory

| | |
|---|---|
| Power supplies | 2 |
| Input voltage, frequency range | 100-240 VAC full range, 50-60 Hz |
| Optional DC power supply | No |
| Max Power supply | 540W |
| Typical, max power consumption | 250W, 282W |
| Weight (lb) | 37 |
| Height | U1 |
| Width | EIA 310-D for 19-inch racks |
| Depth | 61 cm; 24 in |
| Operating temperature | 0-45°C (32-113°F) |
| Allowed relative humidity | 5%-95%, Non-condensing |
| Safety certifications | IEC/EN/UL/CSA/AS/NZS 62368-1 and 60950-1 |
| Electromagnetic emissions certification & susceptibili standard | US (FCC (Part 15 Class A)), Canada (ICES-003), EU (CE (EN 55032/55035)), Australia/NZ (RCM), Japan (VCCI), Korea (KCC), Taiwan (BSMI), China (CCC), India (BIS), EAEU (EAC), Saudi Arabia (CITC), Brazil (Anatel), South Africa (ICASA), Mexico (NOM), Egypt (NTRA) |
| Regulatory compliance | RoHS, WEEE, REACH |
| NetScaler compliance regulatory model | 1U2P2A |

Notes:

1. Published ethernet interfaces compliant per IEEE802.3-2002/2005/2008/2012.
2. Performance varies depending on ciphers deployed. Contact your NetScaler sales representative for details.
3. All 8900 and 9100 series have 80plus platinum rating for power supply. All 15000-50G series have 80plus gold rating for power supply.

| NetScaler models | MPX 9130 FIPS | VPX FIPS |
|---|--|--|
| Attributes | | See NetScaler software section of non-FIPS data sheet, page 5 |
| FIPS Standard | 140-2 Level 2 Certified (#4830) | 140-2 Level 1 Certified (#4898) 140-3 Level 1 Certified (#5111) |
| Memory | 64 GB | |
| Ethernet ports ¹ | 8 x 25GbE SFP28 | |
| Transceivers support | SFP28: 25/10GbE SFP28 SR, DAC 10/1GbE SFP+ SR, LR 10GbE DAC 1GBase | |
| RAID support | No | |
| Performance | | |
| System throughput (Gbps) [L4/L7 throughput] | 30 | |
| L4/L7 HTTP request/second | 1,800,000 | |
| SSL transactions/second (2k key certificates) ² | 35,000 | |
| EDCHE transactions/second | 15,000 | |
| SSL throughput (Gbps) | 30 | |
| Compression throughput (Gbps) | 7 | |
| ICA Proxy concurrent users | Up to 15,000 | Up to 8,000 |
| Mechanical, environmental, and regulatory | | |
| Power supplies | 2 | |
| Input voltage, frequency range | 100-240 VAC full range, 50-60 Hz | |
| Optional DC power supply | No | |
| Max Power supply | 450W | |
| Typical, max power consumption | 250W, 282W | |
| Weight (lb) | 37 | |
| Height | 1U | |
| Width | EIA 310-D for 19-inch racks | |
| Operating temperature | 61 cm; 24 in | |
| Allowed relative humidity | 0-45°C (32-113°F) | |
| Safety certifications | EIC/EN/UL/CSA/AS/NZS 62368-1 and 60905-1 | |
| Electromagnetic emissions certification & susceptibility standard | US (FCC (Part 15 Class A)), Canada (ICES-003), EU (CE (EN 55032/55035)), Australia/NZ (RCM), Japan (VCCI), Korea (KCC), Taiwan (BSMI), China (CCC), India (BIS), EAEU (EAC), Saudi Arabia (CITC), Brazil (Anatel), South Africa (ICASA), Mexico (NOM), Egypt (NTRA) | |
| Regulatory compliance | RoHS, WEEE, REACH | |
| NetScaler compliance regulatory model | 1U2P2A | |

Notes:

1. Published ethernet interfaces compliant per IEEE802.3-2002/2005/2008/2012.
2. Performance varies depending on ciphers deployed. Contact your NetScaler sales representative for details.
3. All 8900 and 9100 series have 80plus platinum rating for power supply.



Enterprise Sales
North America | 800-424-8749
Worldwide | +1 408-790-8000

Headquarters
851 Cypress Creek Road, Fort Lauderdale, FL 33309, United States

© 2025. Citrix, Inc. All rights reserved. Citrix and the Citrix logo are trademarks or registered trademarks of Cloud Software Group, Inc. or its subsidiaries in the United States and/or other countries. All other product and company names and marks in this document are the property of their respective owners and mentioned for identification purposes only.